One-Click Cleaner SC Instruction Manual

Thank you for choosing the One-Click Cleaner SC . The One-Click Cleaner SC is a high-performance device designed for cleaning the ferrule end faces of SC connectors,ST connectors and FC connectors . Carefully read this instruction manual befor using this device. Please keep this instruction manual for future reference

1. Safety precautions



Though our device is deemd safe, improper usage or handling can still inflict injury to others.

One-Click Cleaner SC/FC/ST is designed to clean SC/FC and ST connectors only. It is not liable fordamage caused in attempt to apply this device to other applications.

2. Notes on usage

Do not attempt to disassemble as this can cause damage to the device.

Do not re-use cleaning cloth as this will eliminate its cleaning ability

Do not touch the cleaning cloth as this will cause contamination

Do not pull the cleaning cloth, use only the device body.


Do not use this cleaning cleaner when the cloth is empty, as this can cause damage to the connector.

3. Notes on storage for extended periods

Do not expose device to direct sunlight, high temperature or high humidity.

The cover on the guide cap should be closed at all times when device is not in use.


4. Device construction

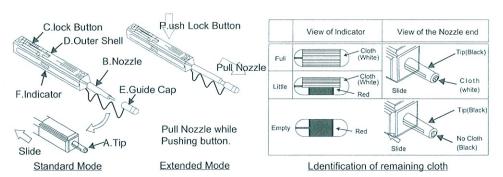


NO	Part Name	Function
Α	Tip	Lead the cleaning cloth to the optical connecter end face.
В	Nozzle	Lead tip to the optical connecter end face.
С	Lock Button	Push the button to extend and contract the nozzle.
D	Outer Shell	Push the outer shell to clean the connector.
E	Guide Cap	Acts as dust cap or cleaning adapter for connector plug.
F	Indicator	Provides indication of remainig cleaning cloth

5.Applications

<Connector inside adapto>
1.Remove Guide Cap from the device




2.Insert tip of cleaner into SC Adaptor



Standard Mode

Extended Mode

3.Push the Outer Shell to start cleaning the SC connector end face .A "click" sound indicates end of cleaning process.Close the cover after use.




Be careful not to slant the One-Click Cleaner SC while inserting into the adapter.


Do not overly exert force during insertion as this may cause damage to both the connector and the One-Click Cleaner SC.

If pushing Outer Shell is inhibited, remove One-Click Cleaner SC form adapter and ensure that there is no sizeable debris inhibiting the cleaning process. <Connector plugs alone>

1. Open the Cover on the Guide Cap



2.Insert SC connector into the Guide Cap



3.Push the Outer Shell to start cleaning the SC connector end face.A "click" sound indicates end of cleaning process. Close the cover after use.



Be careful not to slant SC/FC/ST. connector while inserting into the Guide cap.

Do not overly exert force during insertion as this may cause damage to both the connector and the One-Click Cleaner SC

If pushing Outer Shell is inhibited,remove One-Click Cleaner SC/FC/ST. from adapter and ensure that there is no sizeable debris inhibiting the cleaning process